




Features:

- PASB wheel series:
- flanged wheel made of polyamide 6 with plain bearing
- temperature resistance: -25° C to +90° C

Properties:

- excellent chemical resistance
- low rolling resistance
- affordable
- (old designation: D)

floors



Features:

- SPG wheel series:
- made of special grey cast iron with plain bearing
- wheel flange and running tread are cleanly overwound
- running tread to axle at approx. 3° gradient
- also available with cylindrical tread
- also available with feather key groove according to DIN 6885 for drive
- solid and sturdy construction
- (old designation: SPG)

Note:

The coating is not a permanent coat of paint but rather a protective coating



“Many other versions are available to match your requirements”

flanged wheels							
	bearing surface ø mm	flange ø mm	wheel width with flange mm	wheel width without flange mm	hub length mm	axle hole ø mm	load-carrying capacity kg
PASB-030-20-20-G10 Ident No.: 0015558	30	50	20	15	20	10	35
PASB-035-32-34-G16 Ident No.: 0015559	35	50	32	25	34	16	80
PASB-040-18-18-G15 Ident No.: 0015560	40	55	18	12	18	15	40
PASB-050-28-30-G16 Ident No.: 0015561	50	70	28	20	30	16	100
PASB-050-32-29-G15 Ident No.: 0015562	50	65	32	24	29	15	100
PASB-062-26-29-G16 Ident No.: 0015563	62	80	26	19	29	16	100
PASB-087-32-32-G16 Ident No.: 0015564	87	108	32	25	32	16	200
PASB-100-45-40-G20 Ident No.: 0015565	100	120	45	32	40	20	280
PASB-107-34-35-G18 Ident No.: 0015566	107	138	34	26	35	18	300
PASB-120-42-45-G38 Ident No.: 0015568	120	150	42	30	45	38	380

flanged wheels								
	flange ø mm	bearing surface ø mm	wheel width with flange mm	wheel width without flange mm	hub length mm	hub ø mm	axle hole ø mm	load-carrying capacity kg
SPG-050-32-32-G15 Ident No.: 0023920	62	50	32	26	32	50	15	400
SPG-075-40-47-G20 Ident No.: 0023921	100	75	40	30	47	62	20	700
SPG-100-46-52-G20 Ident No.: 0023922	125	100	46	36	52	62	20	800
SPG-125-46-52-G20 Ident No.: 0023923	145	125	46	36	52	62	20	900
SPG-150-46-52-G20 Ident No.: 0023924	175	150	46	36	52	62	20	1,000
SPG-180-48-52-G30 Ident No.: 0023925	210	180	48	38	52	65	30	1,200
SPG-200-57-60-G30 Ident No.: 0023926	230	200	57	40	60	87	30	1,500
SPG-250-63-70-G40 Ident No.: 0023928	300	250	63	51	70	91	40	2,000




Features:

- SPG Kula wheel series:
- made of special grey cast iron with ball bearing
- wheel flange and running tread are cleanly overwound
- running tread to axle at approx. 3° gradient
- also available with cylindrical tread
- solid and sturdy construction
- (old designation: SPK)


Note:

The coating is not a permanent coat of paint but rather a protective coating

floors




floors




Features:


- SPS wheel series:
- made of C45 steel with ball bearing
- heavy-duty design for maximum load
- running tread to axle at approx. 3° gradient
- solid and sturdy construction
- also available with feather key groove according to DIN 6885 for drive
- or with cylindrical tread
- (old designation: SPK C)



 **"Many other versions are available to match your requirements"**

 **"Highest load-carrying capacity"**

flanged wheels								load-carrying capacity kg
	flange ø mm	bearing surface ø mm	wheel width with flange mm	wheel width without flange mm	hub length mm	hub ø mm	axle hole ø mm	
SPG-050-32-32-K15 Ident No.: 0023937	62	50	32	26	32	50	15	400
SPG-075-40-47-K20 Ident No.: 0023938	100	75	40	30	47	62	20	700
SPG-100-46-52-K20 Ident No.: 0023940	125	100	46	36	52	62	20	800
SPG-125-46-52-K20 Ident No.: 0023942	145	125	46	36	52	62	20	900
SPG-150-46-52-K20 Ident No.: 0023943	175	150	46	36	52	62	20	1,000
SPG-150-46-52-K20-AD162 Ident No.: 0023944	162	150	46	36	52	62	20	1,000
SPG-180-48-52-K20 Ident No.: 0023946	210	180	48	38	52	65	20	1,200
SPG-200-57-60-K25 Ident No.: 0023947	230	200	57	40	60	87	25	1,500
SPG-200-80-90-K40 Ident No.: 0023950	230	200	80	62	90	110	40	3,000
SPG-250-65-70-K30 Ident No.: 0023952	300	250	65	50	70	90	30	2,000
SPG-250-65-70-K40 Ident No.: 0023954	300	250	65	50	70	110	40	3,000

flanged wheels							load-carrying capacity kg
	flange ø mm	bearing surface ø mm	wheel width with flange mm	wheel width without flange mm	hub length mm	axle hole ø mm	
SPS-100-70-70-K25 Ident No.: 0039147	130	100	70	50	70	25	1,250
SPS-125-46-52-K20 Ident No.: 0033613	145	125	46	35	52	20	1,400
SPS-150-52-52-K30 Ident No.: 0023945	175	150	52	38	52	30	1,800
SPS-200-62-62-K40 Ident No.: 0023948	230	200	62	39	62	40	2,500
SPS-250-72-72-K50 Ident No.: 0023953	290	250	72	50	72	50	3,000
SPS-300-75-75-K60 Ident No.: 0023955	340	300	75	52	75	60	4,000
SPS-350-75-75-K50 Ident No.: 0034644	400	350	75	52	75	50	5,000

Matching accessories can be found on page 432



Features


- castor series HB/SPG:
- with SPG ball bearing wheel
- made of special grey cast iron with ball bearing
- wheel flange and running tread are cleanly overwound
- running tread to axle at approx. 3° gradient
- cylindrical tread is also available optionally

Housing:

- heavy welded steel construction, galvanized
- (old designation: BP/SPK)

fixed castors	flange ø mm	bearing surface ø mm	wheel width with flange mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
B-HB-SPG-100-K ID: 0015385	125	100	46	135 x 110	105 x 80	11	400
B-HB-SPG-125-K ID: 0015386	145	125	46	135 x 110	105 x 80	11	500
B-HB-SPG-150-K ID: 0015387	175	150	46	135 x 110	105 x 80	11	700
B-HB-SPG-200-K ID: 0015388	230	200	57	135 x 110	105 x 80	11	1,100

floors




Features:

- DSPG wheel series:
- made of special grey cast iron with ball bearing
- available versions: with angular or v-shaped groove
- also available with feather key groove according to DIN 6885 for drives
- (old designation: DSPK)




flanged wheels	flange ø mm	bearing surface ø mm	wheel width with flange mm	wheel width without flange mm	hub length mm	axle hole ø mm	load-carrying capacity kg
DSPG-120-40-40-K20-VNUT Ident No.: 0012447	120	100	40	26	40	20	650
DSPG-120-40-40-K20 Ident No.: 0015903	120	100	40	26	40	20	650
DSPG-200-50-50-K25 Ident No.: 0015904	200	170	50	34	50	25	900
DSPG-200-50-50-K25-VNUT Ident No.: 0015905	200	170	50	34	50	25	900

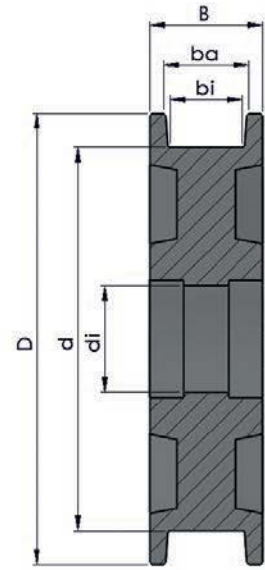

Features:

- DSPS wheel series:
- made of C45 steel with ball bearing
- available versions: with angular and v-shaped groove
- also available with feather key groove according to DIN 6885 for drives
- (old designation: DSPK steel)

floors



 **"Many other sizes available on request"**

flanged wheels	d flange ø mm	d bearing surface ø mm	wheel width with flange mm	wheel width without flange mm	hub length mm	axle hole ø mm	load-carrying capacity kg
DSPS-100-40-40-K15-VNUT Ident No.: 0028300	100		40	20	40	15	600
DSPS-110-57-57-K20 Ident No.: 0035753	125	110	57	43	57	20	1,200
DSPS-106-60-60-K20 Ident No.: 0037179	150	106	60	25.5	60	20	1,200
DSPS-180-60-60-K35 Ident No.: 0038427	200	180	60	43	60	35	1,500
DSPS-200-90-90-K45-VNUT Ident No.: 0038288	200		90	60	90	45	1,500
DSPS-250-80-80-K50 Ident No.: 0036010	275	250	80	55	80	50	1,500
DSPS-250-90-90-K50 Ident No.: 0036011	275	250	90	70	90	50	1,800