


Adjustable plugs | Adjustable plugs, round

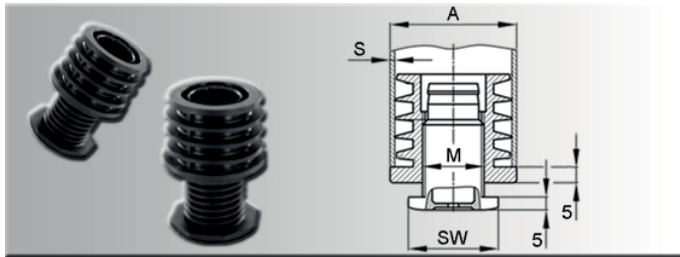

One-piece external body with injection-moulded thread.  
 Octagonal screw head  
 Axial load capacity: up to max. 300 kg.  
 Load capacity:  
 - The adjustment of the feet has to be effected unloaded  
 - The axial static load indicated refers to a screw that is unscrewed by 10 mm, and is seated on plane ground  
 - The adjustable plugs are unsuitable to be used as load gliders  
 - The adjustable plugs are not suitable for dynamic load


Material: PA  
 Colour: black

A x S = external pipe diameter x wall thickness

Further types on written request.

Part no.	AxS	MxL	SW	Part no.	AxS	MxL	SW	Part no.	AxS	MxL	SW
0600320	32x1,5-2	M22x25	28	0600400	40x1,5-2	M22x25	28	0600480	48x1,5-2	M22x25	28
0600350	35x1,5-2	M22x25	28	0600420	42x1,5-2	M30x30	41	0600500	50x1,5-2	M30x30	41
0600380	38x1,5-2	M22x25	28	0600450	45x1,5-2	M30x30	41				

Adjustable plugs | Adjustable plugs, square

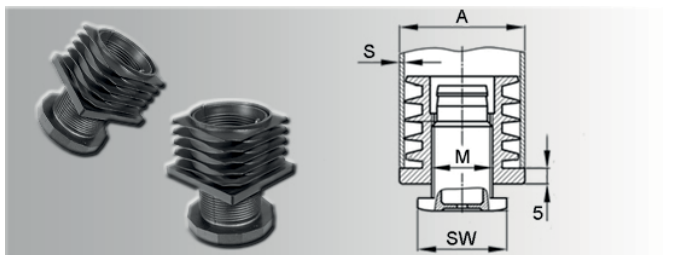

One-piece external body with injection-moulded thread.  
 Octagonal screw head (except 0602020 + 0602222, hexagonal)  
 Axial load capacity: M10 = approx. 100 kg / M16 = approx. 150 kg / >M22 = approx. 300 kg  
 Load capacity:  
 - The adjustment of the feet has to be effected unloaded  
 - The axial static load indicated refers to a screw that is unscrewed by 10 mm and is seated on plane ground  
 - The adjustable plugs are unsuitable to be used as load gliders  
 - The adjustable plugs are not suitable for dynamic load

Material: PA  
 Colour: black

A x S = external pipe diameter x wall thickness

Further types on written request.

Part no.	AxS	MxL	SW	Part no.	AxS	MxL	SW	Part no.	AxS	MxL	SW
0602020	20x20x1,5-2	M10x25	20	0603031	30x30x1,5-2	M22x60	28	0605050	50x50x1,5-2	M30x30	41
0602222	22x22x1,5-2	M10x25	20	0603535	35x35x1,5-2	M22x25	28	0606060	60x60x1,5-2	M42x40	58
0602525	25x25x1,5-2	M16x25	28	0604040	40x40x1,5-2	M22x25	28				
0603030	30x30x1,5-2	M22x25	28	0604545	45x45x1,5-2	M30x30	41				